

PRODUCT SPECIFICATION



Product name:	<u>UHF RFID Fabric Tag</u>
Item No.:	<u>LDR-7015W</u>
Version:	<u>V1.0</u>
Date:	<u>2019.12.25</u>


Tel: +86-755-89379391

Fax: +86-755-89379456

E-mail: sales@leadercolor.com

www.leadercolor.com

Add: 2F, Building A11, No.6 Xinfeng Road, Taizhong Industrial Zone, Longgang District, Shenzhen China 518172

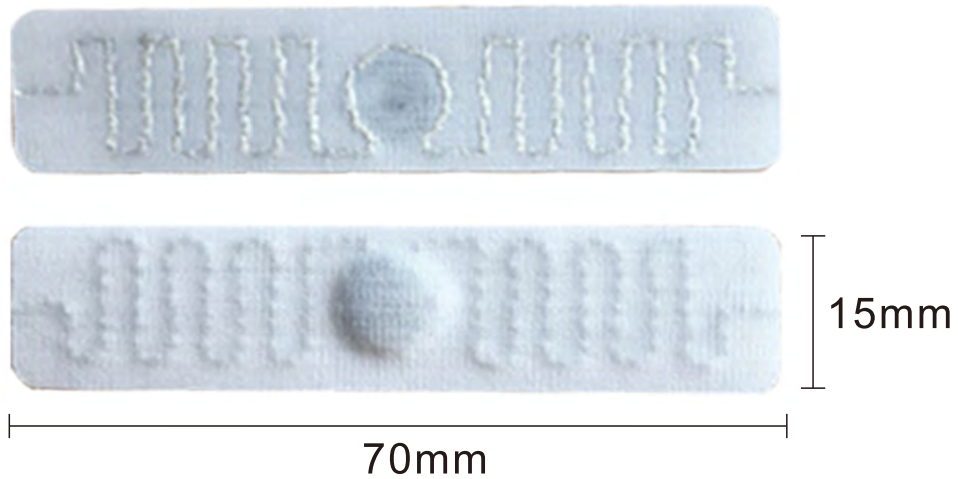

Quick Details

LDR-8717W UHF RFID Fabric Tag is compliant with EPC C1G2 (ISO18000-6C) standard and it fits for all 860-960MHz UHF RFID readers and antennas. With excellent reading performance and the highest thermal and mechanical resistance, it can be inserted into the narrow hems of garments and other kinds of textile products, which is suitable for industrial application and private wear.

RFID Parameter

Model No.	LDR-7015W
Type	Passive UHF RFID Washable Tag
Protocol	ISO/IEC 18000-6C, EPC Class1 Gen2
Frequency	Worldwide 840-960MHz, US 902-928MHz, EU 865-868MHz
Chip	NXP Ucode 7
Memory	EPC 128bit/TID 96bits/No User memory
Read&Write	Supported
Read Range	Fixed: 6m (20feet)/ Handheld: 4.5m (15feet)
Data retention	10years
Programming Cycles	100,000 cycles

Physical Parameter

Size	70×15mm / 2.76×0.59inch
Material	50% cotton, 50% polyester
Washing cycles	200 cycles
Heat resistance	-40~ 85°C (-40~185°F)
Installation	Self adhesive

Laundry Cycle Parameter

Maximum temperature	220°C (428°F), 30s, 2.5 bars
Washing	100°C (212°F), 60mins, 120 bars
Pre-drying in tumbler	160°C (320°F), 30mins
Tunnel ironing	185°C (365°F), 30mins
Sterilization process	134°C (273.2°F), 20mins, RH 85%
Water extractor process	60 bars
Chemical resistance	Endure all chemicals common to the washing endurance

Details



Application

- Automate operational process during laundry
- Improve the accuracy of information between
- The laundry and its customers
- Hospital uniforms & Hotel sheets tracking

